


Rohrnippel - 409

ähnl. DIN EN 10241 (DIN 2982), mit durchgehendem Gewinde,
G-DIN ISO 228-1

Nipple - 409

similar to DIN EN 10241 (DIN 2982), with continuous thread,
G-DIN ISO 228-1

Abm./Dim.	L mm	S mm	Ø mm	Kg/Stk./pc	EN 1.4571
					Artikel-Nr. Article-No
1/8"	16,0	2,00	10,00	0,004	● 35251
1/4"	18,0	2,30	13,50	0,007	● 35250
3/8"	22,0	2,30	17,20	0,010	● 35258
1/2"	25,0	2,60	21,30	0,018	● 35249
3/4"	30,0	2,60	26,00	0,029	● 35257
1"	35,0	3,20	33,70	0,047	● 35254
1 1/4"	38,0	3,20	42,40	0,058	● 35253
1 1/2"	38,0	3,20	48,30	0,097	● 35252
2"	45,0	3,60	60,30	0,146	● 35256
2 1/2"	55,0	3,60	76,10	0,250	● 35255

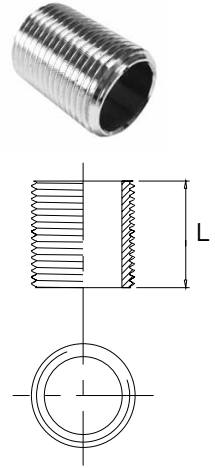

Rohrdoppelnippel - 410

ähnl. DIN EN 10241 (DIN 2982), mit beidseitigem Gewinde,
R-DIN EN 10226

Barrel nipple - 410

similar to DIN EN 10241 (DIN 2982), with thread on both ends,
R-DIN EN 10226

Abm./Dim.	L mm	S mm	Ø mm	Kg/Stk./pc	EN 1.4571
					Artikel-Nr. Article-No
1/8"	30,00	2,00	10,00	0,010	● 35278
1/8"	60,00	2,00	10,00	0,020	● 35279
1/8"	120,00	2,00	10,00	0,040	● 35277
1/4"	30,00	2,30	13,50	0,019	● 35272
1/4"	40,00	2,30	13,50	0,026	● 35273
1/4"	50,00	2,30	13,50	0,032	● 35274
1/4"	60,00	2,30	13,50	0,039	● 35275
1/4"	80,00	2,30	13,50	0,052	● 35276

